
POLARIS RZR XP 1000



Kit Components:					
Item #	Qty.	Description	Item#	Qty.	Description
1	1	Frame Mount	3.2	4	3/8"-16 Hex Nut Flange Nylock GR5
2	1	Plow Mount	3.3	2	M10-1.25 X 100 Hex Bolt Flange GR10.9
3	1	Hardware Kit HK-435	3.4	2	M10-1.25 Hex Nut Flange Nylock
3.1	4	3/8"-16 X 1.00" Hex Bolt Flange Serrated GR5			





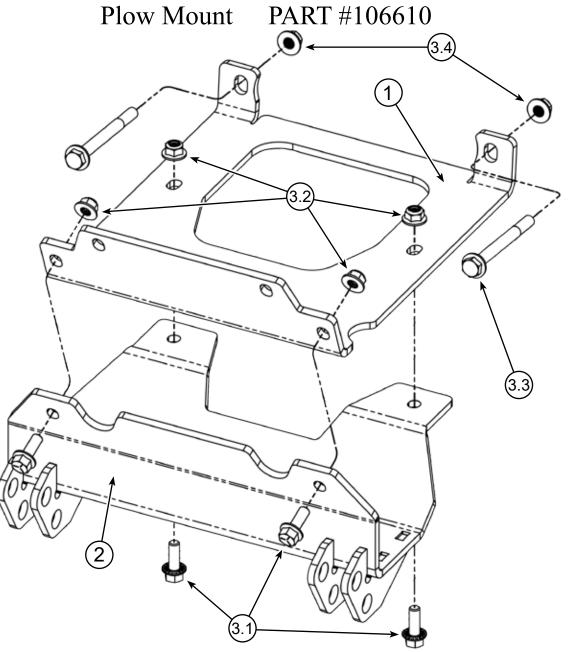

INSTALLATION INSTRUCTIONS

Note: Make sure all hardware needed to complete this mount is in the package. Thoroughly read through and understand the instructions before installing.

- The winch mount for this machine must be installed before the plow mount can be installed. The front plactics shown in Figure 1 will already be removed and will not be reinstalled.
- 2. Locate the front lower bolts (A) shown in **Figure 1**, and remove them from the machine. This hardware will be reused.
- 3. Safely jack up the machine to take the pressure off of the A-Arms. Remove the rear bolts (B) from the lower A-Arms as shown in **Figure 1**. This hardware will not be reused.
- 4. Place the Frame Mount (1) on the machine as shown in **Figure**2 and loosely secure the front with Bolts (A), removed in Step 1.
- 5. Install bolts (3.3) through the Frame Mount (1) and through the original locations on the lower A-Arm as shown in **Figure 3**. Complete on both sides and secure with nuts (3.4) *Not Shown*.
- 6. Tighten hardware evenly according to manufactures specification
- 7. Use hardware (3.1 and 3.2) to attach Plow Mount (2) onto the Frame Mount (1) as shown in **Figure 4** and the **Exploded Diagram** on the front page.

Note: Plow Mount (2) is designed to be removed in the off season so you don't lose ground clearence.

8. Tighten Hardware (3.1 and 3.2) evenly.

