

PLOW LEVER LIFT


Plow Lever Lift

Part#: 106045

Hardware Kit: HK-155

Kit Components:

Item #	Qty.	Description
1	1	Plow Lever Lift Bracket
2	1	Plow Lever Lift Channel
3	1	5/8" Hitch Pin W / Clip
4	1	HK-155
4.1	4	3/8"-16 x 1-1/2" Short Neck Carriage Bolt
4.2	2	3/8"-16 x 3" Hex Flanged Bolt
4.3	2	3/8"-16 Hex Flanged Nylok Nut

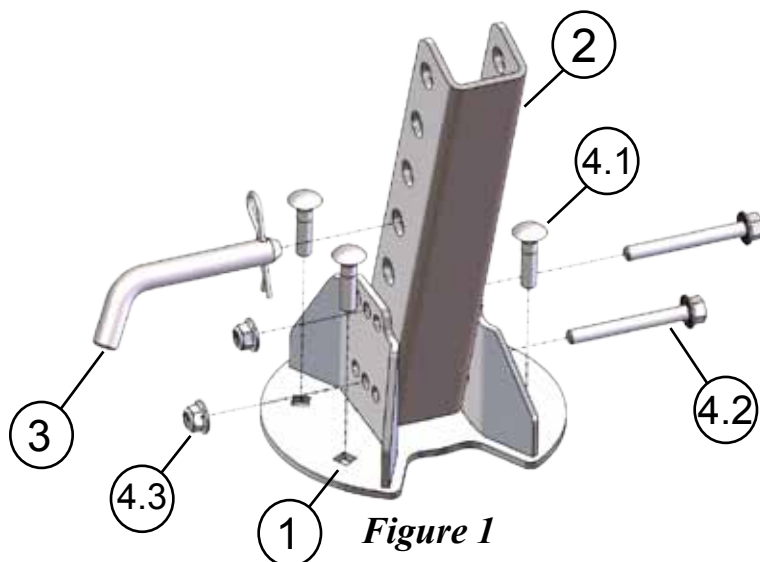

INSTALLATION INSTRUCTIONS:

1. Remove the four 3/8" carriage bolts (A) as shown in **Figure 2**.
2. Mount Plow Lever Lift Bracket in location (A) using the four longer 3/8" carriage bolts (4.1) supplied in the hardware kit as shown in **Figure 1 & 2**.

NOTE: Depending on make and model of machine, you will need to adjust plow lever lift to achieve proper lifting angle.

3. Place lever lift arm as far forward towards blade to allow maximum pull as shown in **Figure 3 & 4**. **NOTE:** Check location by rotating plow blade as far right & left to make sure nothing hits.
4. Mount plow lever lift channel in location using the two 3/8" bolts (4.2) supplied in the hardware kit as shown in **Figure 1**.
5. Once desired location has been achieved, tighten all bolts.
6. Place hitch pin (3) in plow lever lift channel (2) to achieve desired lift angle as shown in **Figure 3**. **NOTE:** Multiple configurations can be achieved to fit any machine.
7. Attach winch hook (B) to Plow Lever Lift Channel as shown in **Figure 3**.


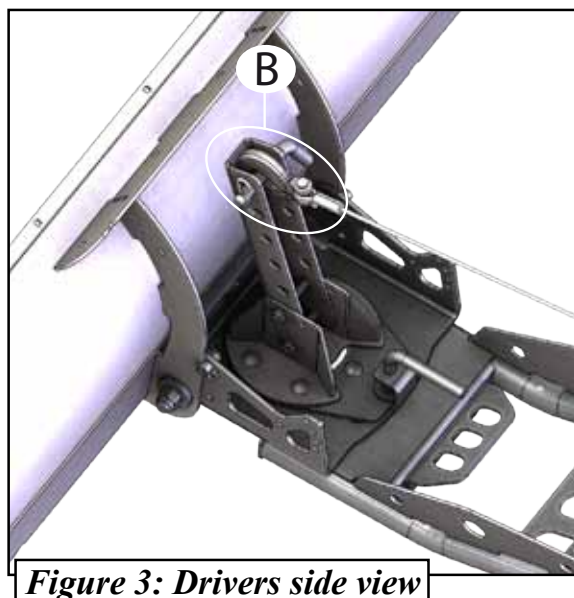


Figure 4

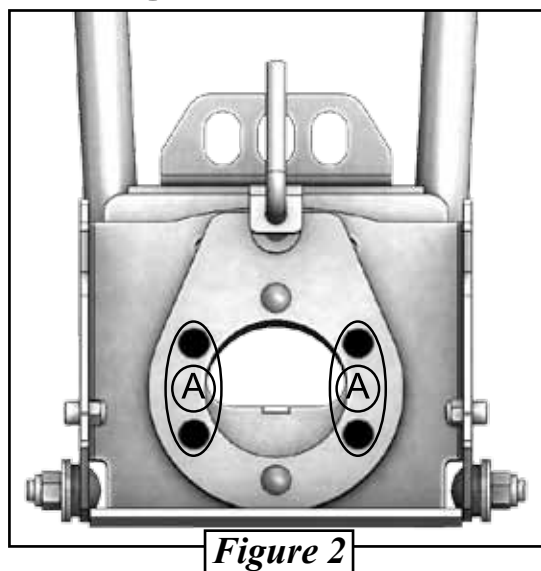