

Assembly Instructions

| | |
|-----------------------|--------------------------------------|
| Model: | Polaris RZR Trail |
| Description: | Polaris RZR Trail Audio Roof |
| Part Number: | MBQRT2-S6R, MBQRT2-S7R, MBQRT2-S7RRC |
| Assembly Time: | 90 Minutes (1.5-Hours) |

It is always to best practice disconnecting your negative battery terminal prior to any electronics installations to avoid damaging the vehicle's electrical system. Before you begin, read through these instructions and check that all parts are present.

This installation may require specials skills and tools to complete. It may be necessary to seek a trained installation technician to complete this installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

| Parts List | | |
|------------|---------------------------------|-----|
| No. | Component Name | Qty |
| 1 | Roof | 1 |
| 2 | Power Harness | 1 |
| 3 | Zip Ties | 5 |
| 4 | Pulse Harness | 1 |
| 5 | M8x30 Hex Bolt | 2 |
| 6 | M8x20x2 Black Washer | 4 |
| 7 | M8x18x2 Rubber Washer | 2 |
| 8 | M8 Nylon locking Nut | 2 |
| 9 | M8x40 Hex Bolt with Threadpatch | 2 |
| 10 | M8x35x2 Black Washer | 2 |
| 11 | M8x30x2 Rubber Washer | 2 |
| 12 | M8 Speed Clip | 2 |
| 13 | Clamp with Rubber Pad | 2 |
| 14 | 10" Antenna Mast | 1 |

| Tools Required | |
|----------------|--------------------|
| 1 | Bojo or Panel Tool |
| 2 | T20 Torx Driver |
| 3 | T40 Torx Driver |
| 4 | Socket Wrench |
| 5 | 13 mm Socket |
| 6 | 10 mm Socket |

Disassembly Instructions

- Unclip the front roof mount on the driver and passenger side ROPS.



- Remove two bolts, one from each rear corner of the OEM roof.




- Lift the front of the OEM roof up and push towards the back of the vehicle to unclip the rear tabs. Then lift off.



Disassembly Instructions

- Twist the hood locks and remove the hood.

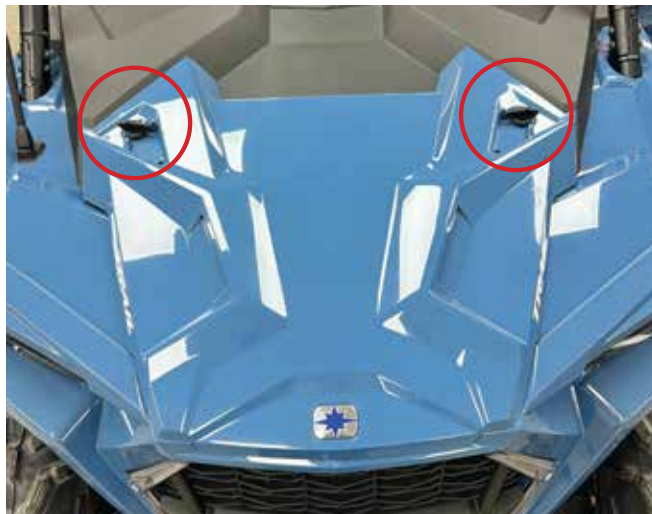

- Remove two push clips behind the radio bezel. Unclip the radio housing.



- Remove four bolts from the upper dash panel and remove panel.



Assembly Instructions

- Remove lightbar from the roof before setting roof on the vehicle. Now set the MB Quart roof on top of the vehicle and verify mounting holes line up.



- Reinstall (2) M8x35mm bolts with M8x30mm metal washers and M8x26 rubber washers down through the lightbar. Install the rubber washer underneath the metal washer. Make sure they go through the ROPS.



- Loosely install m8x30mm metal washer and M8 nylon locking nuts to front bolts.



Assembly Instructions

- Slide the two M8 speed clips onto the rear ROPS corner brace. Make sure the corner brace goes inside the clip.



- Loosely install two outer M8x40mm bolts, M8x35mm metal washers and M8x30 rubber washers down through the rear corner holes. Make sure they align with the speed clips.

NOTE

Make sure the rubber washer is installed underneath the metal washer



- Install two center ROPS mounting brackets with m8x30mm bolts, M8x20 metal washers, M8x18 rubber washer, and M8 nylon locking nut.



- On the passenger side front corner of the ROPS there is a hole where you run your audio roof harness down. Attach the harness to a long wire or zip tie to aid in getting through the hole at the bottom of the ROPS near the dash



Installation Instructions

- Run the wire through the gap in the panel to the big grommet in the center of the firewall. Push the harness through the grommet into the under hood cavity where the Pulse network connectors are.




Installation Instructions

- Connect the harness to the supplied Pulse network adapter and plug into the Pulse network. You might have to remove a waterproof cap in order to plug in the connector.



- Crimp the fuse holder onto the main power wire. Connect the ring terminal of the fuse holder to the power lug on the Pulse network. Connect the ground wire to the negative lug on the Pulse network (like in the photo).

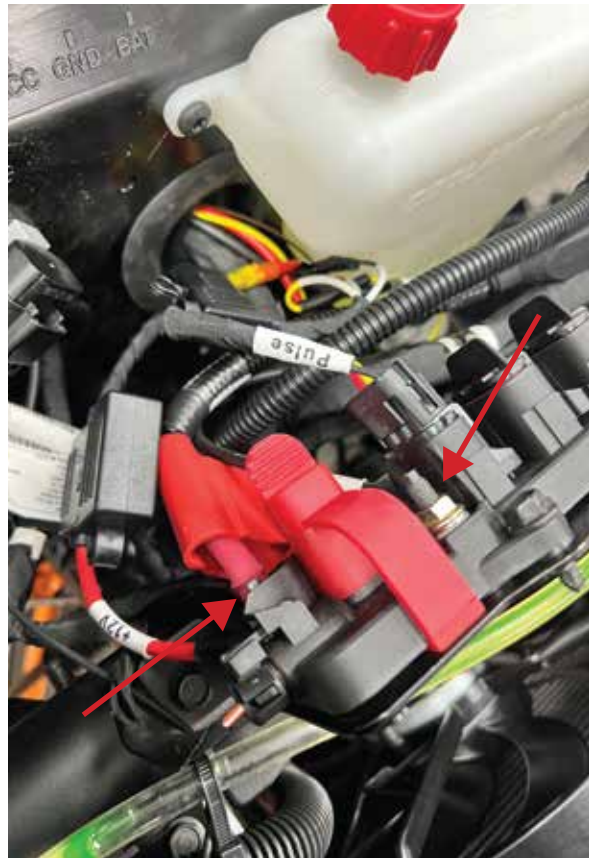

- Test the radio and roof audio. If everything is working properly - repeat the dash disassembly in reverse and enjoy.

FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.



WARRANTY

Maxxsonics, LLC. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics, LLC. will, at its discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics, LLC. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation, and freight are not the responsibility of Maxxsonics, LLC. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

MB Quart products are designed and engineered in the USA by

MAXXSONICS®

www.maxxsonics.com