

READ ALL INSTRUCTIONS CAREFULLY PRIOR TO INSTALLATION

⚠ WARNING:

- Inspection Tie-Downs before each use.
- DO NOT exceed the speed limit.
- Caliber is NOT responsible for the use of this product.

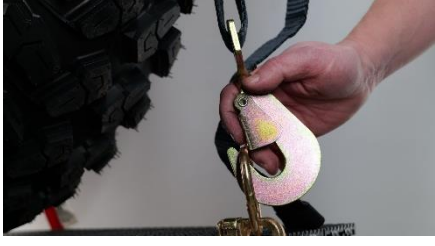
13568: TrailBlazer ORV Tie-Down Kit (2-Pack)		13594: TrailBlazer ORV Tie-Down Kit (4-Pack)	
Description	QTY	Description	QTY
Tie-Down	2	Tie-Down	4
Carry Bag	1	Carry Bag	1

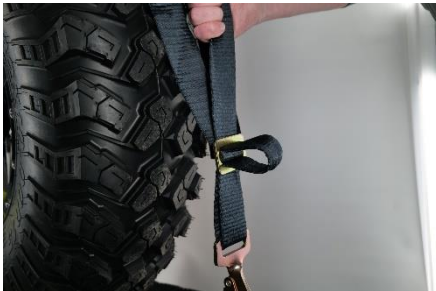


CALIBER INC. LIMITED LIFETIME WARRANTY: Caliber, Inc. warrants that this product will be free from defects in material or workmanship under normal use installation and service. Caliber Inc. reserves the right, before having any obligation under this limited warranty, to inspect the damaged product. All warranty shipping costs for inspection shall be borne solely by the purchaser. This limited warranty is non-transferable.

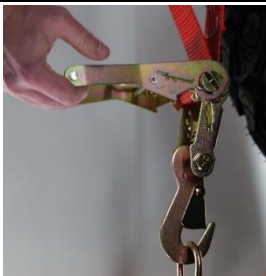
DISCLAIMER: Caliber, Inc. shall not be liable for any special, incidental, or consequential damages, including, but not limited to, lost revenues, lost profits, personal injury, damage to property, and third-party claims, arising out of any warranty, contract, statutory or tort. Notwithstanding the term of any limited warranty or any warranty implied by law, or if any limited warranty fails in its essential purpose, in no event will Caliber's entire liability exceed the purchase price of this product.

Warranty Contact Information
12600 35 Frontage Road W
Burnsville, MN 55337
(952)985-9999
www.caliberproductsinc.com

Step 1: Loosely position tie-down over tire. 	Step 2: Hook tail of tie-down to a fixed anchor point. 
---	--

Step 3: Set height of halo, by adjusting the tail. Ensure tie-down is clear of all suspension and brake components.		
a. Loosen adjuster slide. 	b. Feed strap through slide to correct length 	c. Pull strap through slide to lock slide in position 

Step 4: Set length of upper adjuster on primary strap. Set halo height to clear all suspension and brake components. (Set halo height on ratchet side slightly higher than tail side; ratchet will pull halo down while ratcheting tight.)		
a. Loosen adjuster slide. 	b. Feed strap through slide to correct length 	c. Pull strap through slide to lock slide in position 

Step 5: Use cinch strap to secure loose end. 	Step 6: Hook ratchet end to anchor point and tighten ratchet. 
---	--