



## Installation Instructions

<b>Model:</b>	2020-2024 Polaris RZR Pro XP, Turbo R, Pro R
<b>Description:</b>	MB Quart Polaris RZR Pro 10" Subwoofer Kit
<b>Part Number:</b>	MBQRP-SUB-1
<b>Assembly Time:</b>	60 Minutes (1-Hour)

It is always a best practice to disconnect your negative battery terminal prior to any electronics installations to avoid damaging the vehicle's electrical system. Before you begin, read through these instructions and check that all parts are present.


This installation may require special skills and tools to complete and it may be necessary to seek a trained installation technician to complete this installation. Please note that MB Quart cannot assume any responsibility for damage resulting from incorrect installation.

Parts List		
No.	Component Name	Qty
1	10" Subwoofer and Ported Enclosure Assembly	1
2	Enclosure Mounting Bracket	1
3	M6 x 14mm Flange Bolt with Threadpatch	3
4	M6 Washer	1
5	M6 Speed Clip	2
6	M6 x 45mm Metal Cutting Torx Bolt	2

Tools Required	
1	Bojo or Panel Tool
2	T20, T27 & T40 Torx Driver
3	Rotary Cutting Tool
4	Drill
5	10mm Socket
6	Ratchet

## Disassembly Instructions


- Remove two T40 Torx screws from hood. Slide hood toward rear of vehicle and remove.

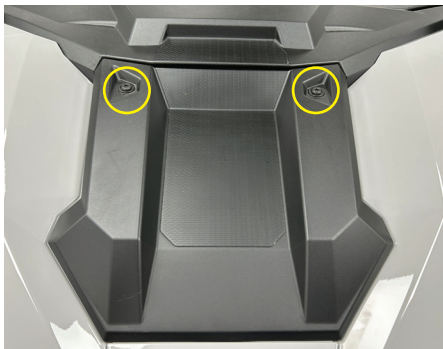

- Remove center cover or storage compartment dependent on vehicle.



- Carefully pull up and remove dash trim to the left of the cluster.

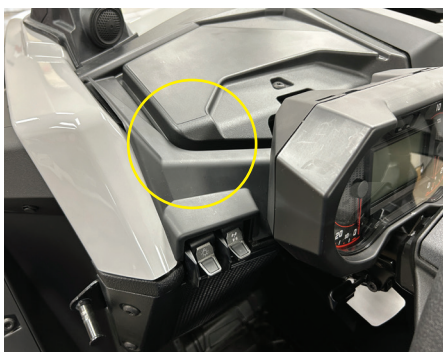



## Disassembly Instructions

- Carefully pull up and remove dash trim to the right of the cluster.



- Carefully pull up and remove dash trim on the right side of the dash.



- Open glove box lid. Using a T20 Torx remove four screws from glove box. Using a T40 Torx remove two screws from front dash.






## Disassembly Instructions

- Remove two T40 Torx screws from center of dash.



- Remove three T40 Torx screws behind cluster.

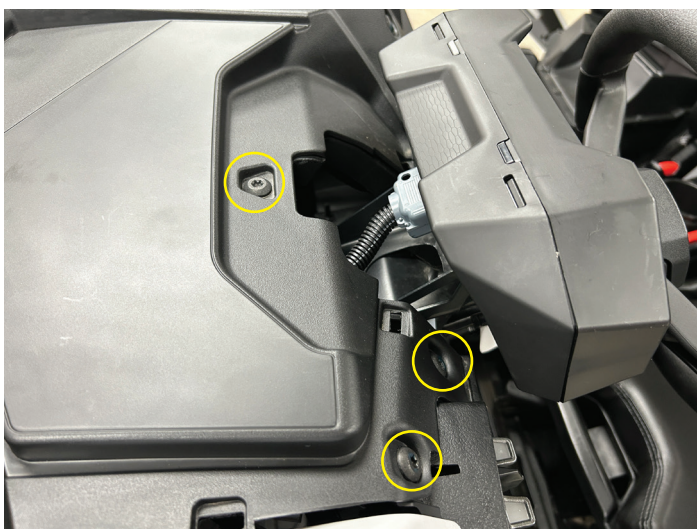


- On the front of the vehicle remove (2) T40 Torx screws and (2) push pin rivets.



## Disassembly Instructions

- Carefully lift edge of left front fender to release from dash. Repeat process on right front fender.

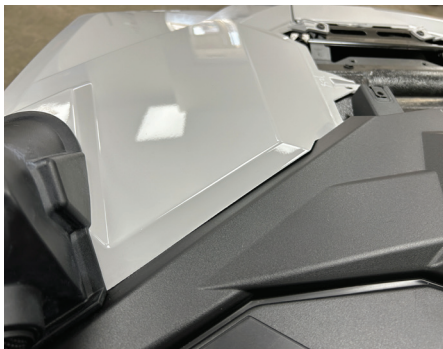


- Carefully keep the front fenders elevated while tilting the dash panel up towards the seating area and slide toward the rear of the vehicle.






## Installation Instructions

- Using a rotary cutting tool remove the shaded area from the under dash tray.

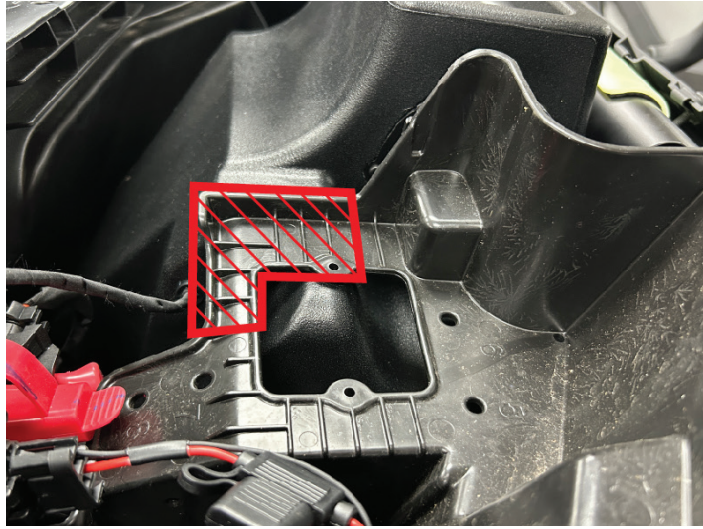

- Install (2) M6 speed clips onto the front cab panel.

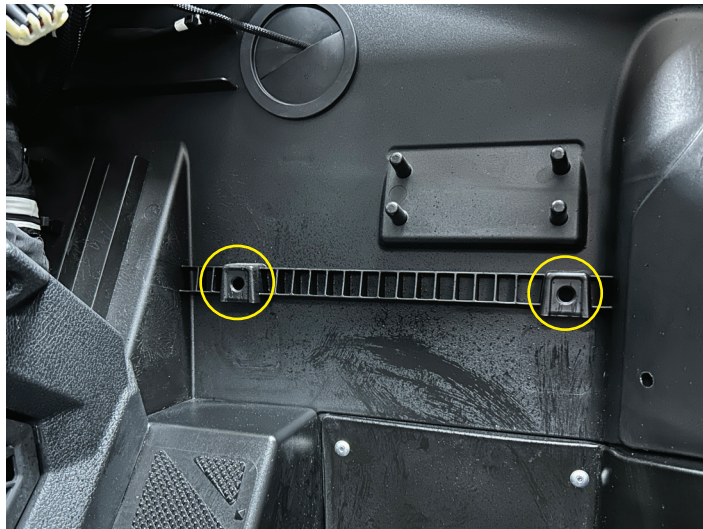


- Rotate subwoofer enclosure assembly into the dash with the MB Quart Logo positioned like below.




## Installation Instructions

- Install mounting bracket onto enclosure and on top of round tube in dash. Install loosely (3) M6 x 14mm bolts with a 10mm socket.

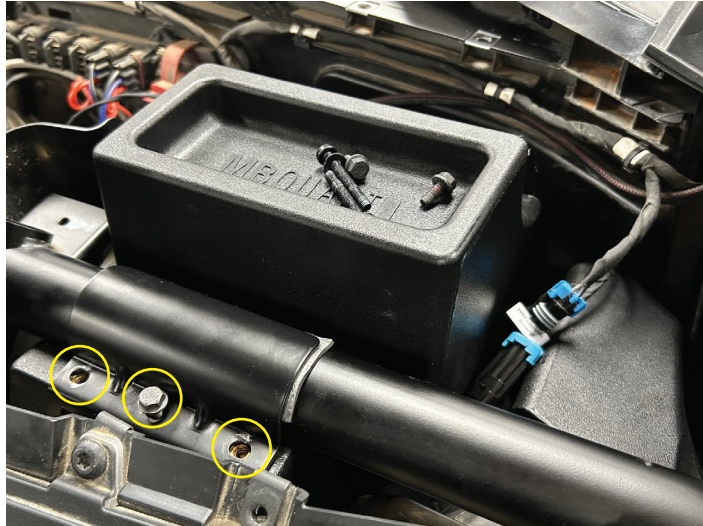

- Install (2) M6 x 45mm Torx bolts (Right one will also have an M6 washer installed) using a T27 Torx bit. Pay attention that the bolts thread into the M6 speed clips.
- After these are tight, then go back and tighten the (3) M6 bolts on the top mounting bracket.

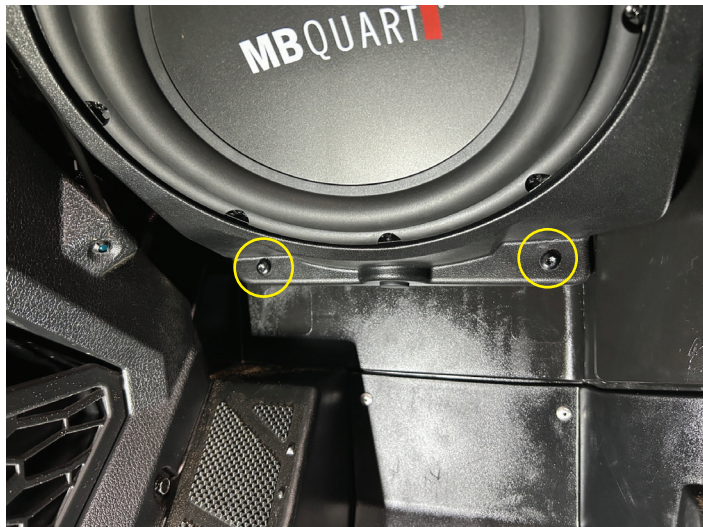

- Make final wiring connections of subwoofer enclosure to amplifier.
- Re-assemble the vehicle in the opposite order.



## FCC Notification

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a mobile installation. This equipment generates uses and can radiate radio frequency energy. If not installed and used in accordance with the instructions, this equipment may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation.

**WARNING:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment complied with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.



### WARRANTY

Maxxsonics, LLC. warrants this product, to the original consumer purchaser, to be free from defects in material and workmanship for a period of one (1) year from the date of purchase. Maxxsonics, LLC. will, at it's discretion, repair or replace defective products during the warranty period. Components that prove to be defective in materials and workmanship under proper installation and use must be returned to the original authorized Maxxsonics, LLC. retailer from where it was purchased. A photocopy of the original receipt must accompany the product being returned. The costs associated with removal, re-installation, and freight are not the responsibility of Maxxsonics, LLC. This warranty is limited to defective parts and specifically excludes any incidental or consequential damages connected therewith. To view the full warranty, please visit the website.

MB Quart products are designed and engineered in the USA by

**MAXXSONICS®**

[www.maxxsonics.com](http://www.maxxsonics.com)