

**79-84167 / 79-84168 / 79-84191 / 79-84192**  
**79-84199 / 79-84200**

**POLARIS XPEDITION LONG TRAVEL KIT**



**HIGHLIFTER**

**SEIZMIK™**



[sales@highlifter.com](mailto:sales@highlifter.com)



800-699-0947 | 8:00am - 5:00pm CST



7455 Atkinson Drive, Shreveport, LA 71129



[www.highlifter.com](http://www.highlifter.com)

Parts Available For These Popular Brands and Others

**POLARIS**

**can-am**



**HONDA**

**Kawasaki**



**YAMAHA**

## **PRODUCT DISCLAIMER:**

The installation of products sold or manufactured by High Lifter Products including, but not limited to suspension components such as lift kits, gear reduction lifts, frame stiffener kits, snorkels, and tires that exceed the original specifications for the vehicle, may change the vehicle's center of gravity and handling characteristics both on- and off-road. You are aware that the installation of tires that are larger than original vehicle specifications may reduce the effectiveness of the braking system. Use of these products may place added stress to the original factory vehicle components which could cause them to weaken or possibly fail.

Products sold or manufactured by High Lifter Products are intended for off-road use only. Operation of a vehicle modified with these products on a road could result in serious bodily injury or death, and such operation may violate the laws of your state or municipality. You agree to operate your vehicle exclusively in the manner intended by the vehicle manufacturer. You agree that failure to safely and reasonably operate your vehicle could result in serious bodily injury or death, and that, as a result of installation of this product(s) to your vehicle, extreme care must be taken to prevent vehicle rollover or loss of control, which may be more likely to occur as a result of said modifications. You will avoid unsafe maneuvers, including sudden sharp turns or other abrupt maneuvers, which could make a vehicular accident more likely. You understand that High Lifter Product is not responsible or liable for any damages or any injuries to yourself or your passengers that could occur upon possible accidents due to driver error, incorrect installations, bad judgment, incompatibility with other aftermarket accessories or natural disasters to the fullest extent allowable by law. You will have all vehicle occupants fasten seat belts, if equipped, and wear proper safety equipment, such as DOT approved helmet and eye protection prior to operating the vehicle. You understand and acknowledge that failure to wear proper safety equipment may increase the risk of serious bodily injury or death to yourself and any passengers.

Proper installation of products sold or manufactured by High Lifter Products requires knowledge of the factory recommended procedures for removal and installation of original equipment components. Installation of these products without proper knowledge and experience may affect the performance of these components and the safety of the vehicle and cause serious bodily injury or death. It is strongly recommended that a certified mechanic familiar with the installation of similar components perform the product(s) installation.

Prior to installing any products sold or manufactured by High Lifter Products, you will perform or cause to be performed an inspection of their vehicle to confirm its condition is suitable for the installation of these products. A proper inspection of the vehicle includes confirmation that the vehicle has not been in a collision and is free of corrosion. If the vehicle is suspected to have been in a collision or misused, or is otherwise unsuitable for modification, you will not install the product(s). You will continue to inspect the vehicle prior to each use to confirm its condition is suitable for its intended use, and you acknowledge that the failure to do so may result in serious bodily injury or death, as well as damage to the vehicle itself.


You will install any warning labels provided with the product so it may be prominently seen by yourself and all passengers. You will notify all passengers of the modifications performed to your vehicle prior to operation.

Insurance companies may handle coverage of a modified vehicle differently. Please check with your insurance carrier prior to modifying the vehicle to ensure your coverage remains sufficient. Installation of this product(s) may void your vehicle warranty. If this is a concern, please check with the manufacturer or dealer before purchase or installation of this product(s).


## FRONT A-ARM INSTALLATION

### PARTS DIAGRAM

#### FRONT UPPER CONTROL ARM




79-84092-L  
Left Control Arm  
(1ea)




79-84092-R  
Right Control Arm  
(1ea)

#### FRONT LOWER CONTROL ARM




79-84098-L  
Left Control Arm  
(1ea)



79-84098-R  
Right Control Arm  
(1ea)



79-10099  
Adjustable Collar  
Wide/107Z  
(2ea)



79-10098  
Adjustable Collar  
Narrow/107Y  
(2ea)

79-84177  
Rear Facing  
Front Shock  
Relocation  
Brackets  
(1ea)

79-14813  
Brake Line  
Clamps  
(2 Boxes)

54-96123  
Flange Head  
Bolt 12x80mm  
(4ea)

73-13372  
Short Spacer  
(2ea)

73-13372  
Long Spacer  
(4ea)



79-84178  
Front Facing  
Front Shock  
Relocation  
Brackets  
(1ea)

54-61341  
Zip Ties

73-16738  
Brake Line  
61"  
(1ea)

54-60993  
Bolt  
12x110mm  
(2ea)

54-61040  
Lock Nut  
12mm  
(6ea)

54-61040  
12mm  
Washers  
(18ea)

79-11622  
Steering  
Stops (2ea)

XX-XXXXX  
Rear Shock  
Relocation  
Brackets  
(2ea)

DHT-X or  
Turner Axle  
(4ea)



1



## FRONT PASSENGER SIDE

**Keep all factory hardware.**

Place jack under the FRONT center of the UTV and lift until the weight is off the suspension. Ensure that the vehicle is properly secured, so that it is stable on the jack.

**Remove the front wheels.**



## REMOVING STOCK COMPONENTS

## BRAKE CALIPER

2



You will need to remove the nut and bolt that holds the clamps to the brake lines and arm.

Then remove the brake calipers and set them aside.

## REMOVING STOCK COMPONENTS

## BRAKE CALIPER

3



Remove the brake drum, cotter pin, axle nut, and washers from the hub assembly.

**YOU WILL RESUSE THE FACTORY HARDWARE** to reconnect the new control arms to the frame.



4



Before removing the upper and lower arms from the front hub assembly, you will first need to disconnect:

- A. Tie Rod    B. Lower Shock End    C. Upper Ball Joint    D. Lower Ball Joint    E. Sway Bar Link

5




Remove the **Lower Arm FIRST** by removing the bolts at the knuckle and the frame.  
**KEEP ALL FACTORY HARDWARE.**



Disconnect the **Upper Arm** by removing the bolts from the frame.  
If it has a winch, you will have to remove to get to Upper Arm Bolts.  
**KEEP ALL FACTORY HARDWARE.**

6

**NOTE: IF YOU HAVE ACCESS TO A BLIND BEARING PULLER, WE HIGHLY RECOMMEND USING THIS TOOL OVER THIS METHOD. USING A PUNCH MAY CAUSE DAMAGE TO THE BUSHINGS.**

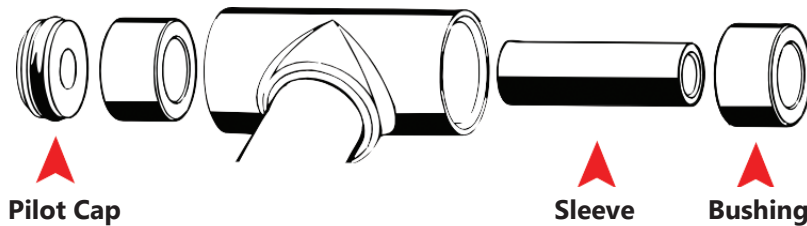

### UPPER ARM

Remove pivot caps and sleeves from both arms.

**You will need to reuse your factory pivot caps, bushings, sleeves, and ball joints.** Make sure that you inspect your bushings and ball joints for wear. Replace as needed.


Use a blind bearing puller or a flat punch to remove the bushings.

**Use caution** when removing the bushing from the collar, there is a stop built into the factory arm that prevents the bushing from pushing out when installed. Because of this, the bushing must be pushed out from the opposite side.

### BUSHINGS

### INSTALL

7

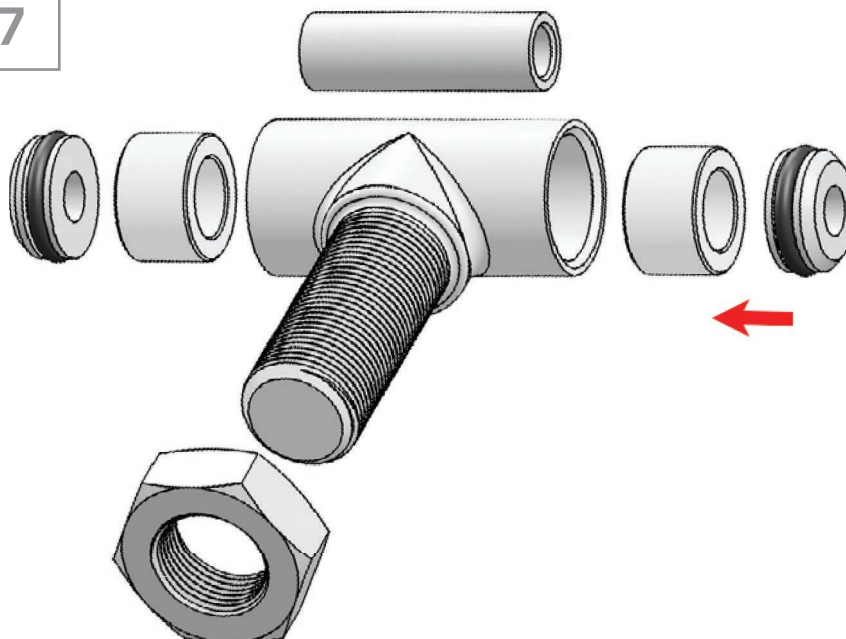

### LOWER ARM

Once the bushing is inserted, **you will need to use a socket, of the same diameter as the bushing**, to help press it in all the way.

Applying grease to the bushings and sleeves will make the installation easier.

Use a press or vice to secure the bushings.

8

**NOTE: IF YOU HAVE PRE-INSTALLED BALL JOINTS SKIP TO STEP 10 FOR DEMONSTRATIVE PURPOSES WE USED THE LOWER CONTROL ARM, BUT THE PROCESS IS SIMILAR FOR BOTH. A PRESS OR A VISE IS SUGGESTED FOR REMOVING AND REPLACING THE BALL JOINTS.**

### REMOVE RETAINING CLIPS



Back the ball joint with a large 36mm socket or something sturdy of similar diameter, then using a press or vise, press the ball joint out of the arm.


9

Flip the control arm over, and using the same process, press the ball joint in using a vise or press. If you press in the ball joint crooked, **DO NOT TRY TO FORCE IT IN!** If you try to force it straight, you can "egg" the opening. Press the ball joint out and reinsert it into the opening, pressing it in with a vise. Verify that the clip snaps into place after installing the ball joints into the new Control Arm. **You should always double check the ball joint snap ring for proper fit.** Even if you use snap ring pliers, it may not seat. You can use a flathead screwdriver and a hammer to tap the snap ring to ensure that it is seated into the groove.



Snap the retaining clip down on to the base of the ball joint.

10

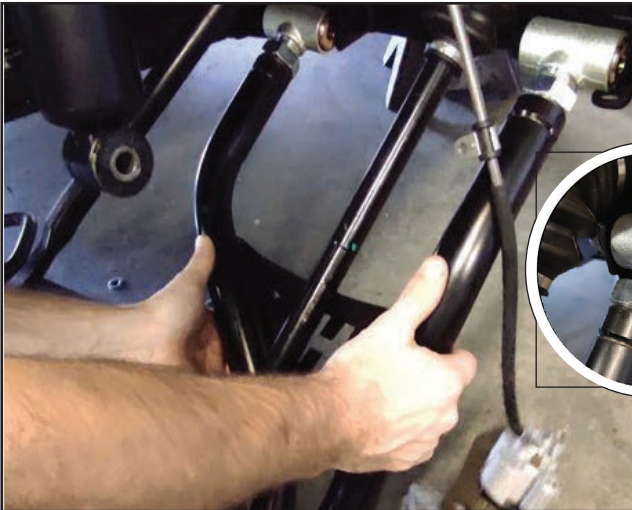

Connect the new lower arm at the frame using the factory hardware.



Connect the hub at the LOWER pinch bolt FIRST, then slide the axle through AFTER.  
**DO NOT FORGET WASHERS.**

**NOTE: MAKE SURE BRAKE LINE IS ROUTED OUTSIDE THE LOWER ARM TO THE FRONT OF THE UTV.**

**TIP: LOOSEN JAM NUT FOR EASIER INSTALL**

11




**NOTE: MAKE SURE BRAKE LINE IS ROUTED THROUGH THE UPPER ARM AS SHOWN IN THE PHOTO.**



Using the factory hardware, connect the **new upper arm** to the frame with the pinch bolt on the knuckle, and sway bar if your model has one. Connect the lower shock tab LAST.

12

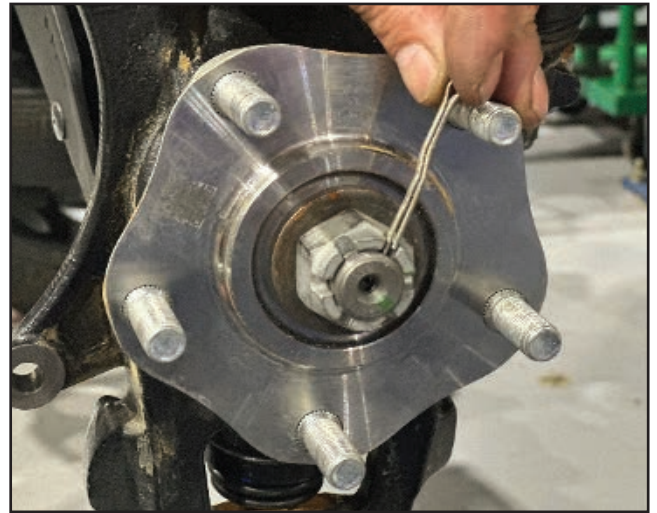

Reattach the rotor to the knuckle assembly. **Install washers and secure using the castle nut and cotter pin.**

13




Unbolt the passenger side brake line and replace with new brake line (73-16738). On the driver side, unbolt factory brake line clamps so the line can be extended to reach.



On the driver side, unbolt factory brake line clamps so the line can be extended to reach.

Connect the caliper to the hub assembly. Make sure that you re-route the brake lines, so that they do not come in contact with moving parts and don't become pinched. Connect the brake line clamp to the arm using the brake line clamps provided in the kit. After installing brake lines, bleed the brakes.

14

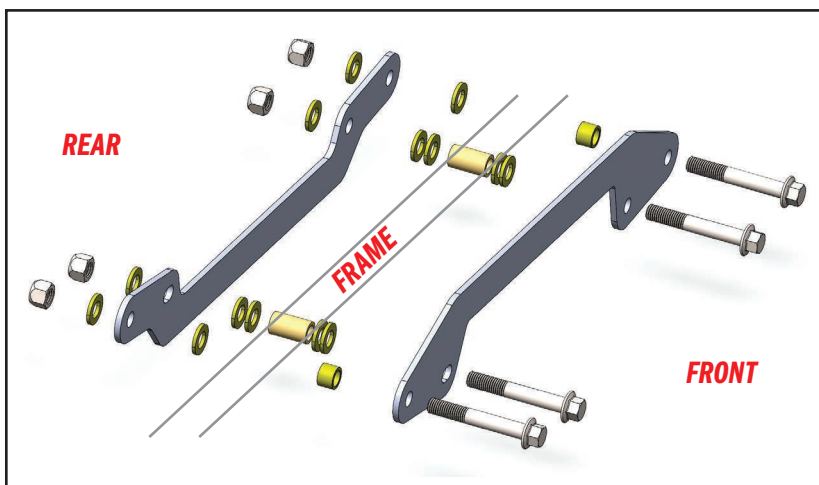


## BEFORE STARTING

- Tire must be off the ground
- Tires must have equal air pressure
- Suspension components must be completely assembled

The new High Lifter lower control arms will come pre-adjusted to factory length, which is .937

If you need to re-adjust the collars, place the factory arm and new control arm on a flat surface. Measure from eyelet to center mount on the factory arm, and then adjust the new arms to those lengths.

**NOTE: WHEN RE-ADJUSTING, LEAVE THE JAM NUTS LOOSE. DO NOT FASTEN TIGHT UNTIL INSTALLED ON UTV, AFTER ALL FINAL ADJUSTMENTS HAVE BEEN MADE.**

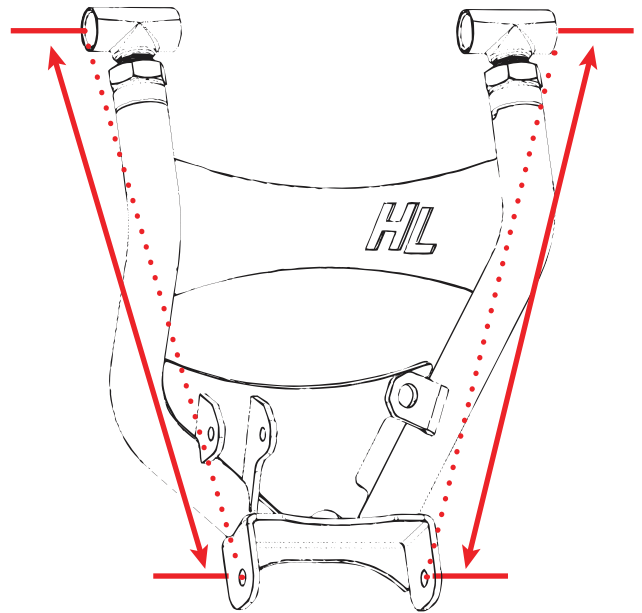


Make all adjustments in small increments.

**Do this by disconnecting the control arms at the frame and adjusting collars.** Once small adjustments have been made. Take the UTV off the jack and roll it back and forth several times to check the camber. Repeat steps as needed. After alignment is complete, tighten jam nuts to 80 ft-lbs and secure it with blue loctite.




### POSITIVE CAMBER

If you have a positive camber, you will need to adjust the collar OUTWARD or lengthen the control arm. The max. amount outward is "1.250" which could give up to 3° of positive camber.




### CORRECT CAMBER

For this application, we recommend a camber setting of 0°. Collars are preset to .937



### NEGATIVE CAMBER

If you have a negative camber, you will need to adjust the collar INWARD or shorten the control arm. The max. amount inward is zero threads exposed and could give over 3° of negative camber.



## TIE ROD INSTALLATION

### PARTS DIAGRAM



54-96445  
1/2" x 3-1/2"  
Bolt (2ea)



54-61093  
Nylon Lock  
Nut (2ea)



79-84023  
1/2" High  
Misalignment  
Cone (2ea)



79-12003  
5/8 Alignment  
Bushing (4ea)



54-61027  
12mm Washer  
(4ea)



78-10224  
Inner Tie Rod  
(2ea)



79-84181  
Tie Rod  
(2ea)




54-60881  
5/8 Right Hand  
Jam Nut (2ea)



73-10618  
Right Hand  
Heim Joint  
(2ea)

1

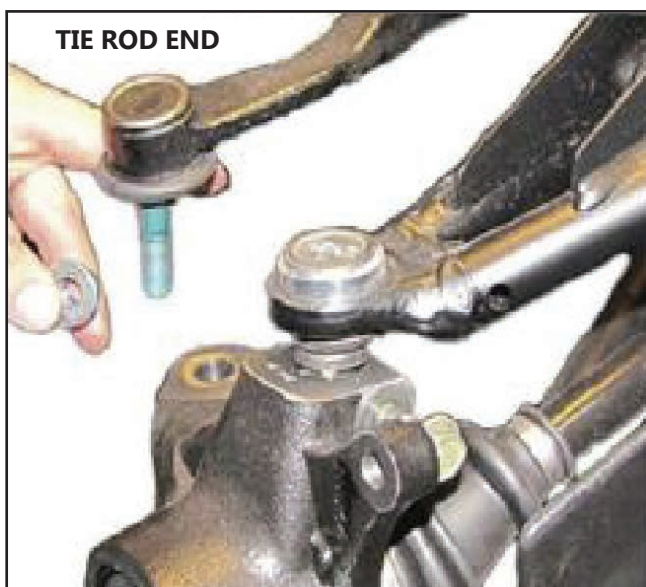

Disconnect the tie rod from the knuckle. (18mm)


2



While applying upward pressure on the tie rod you will have to knock the tie rod end loose using a hammer on the knuckle.

3

Remove the stock clamp from the base of the boot. Slide the boot back. Remove stock tie rod.

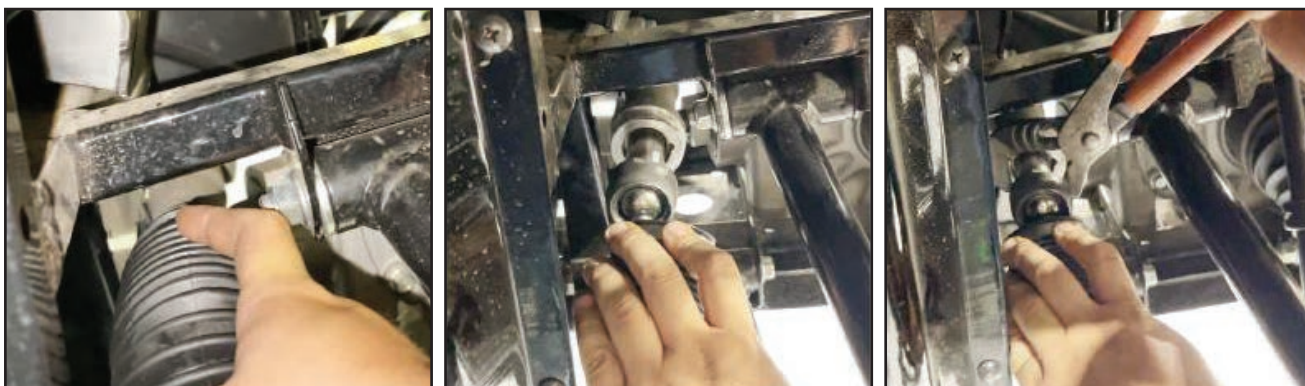


4

Remove the tie rod end so you can slide the boot off. Use needle nose pliers to remove the clamp at the base of the boot.



**Note:** This is how your new HD tie rods will be assembled. Do not install the tie rod at this time.

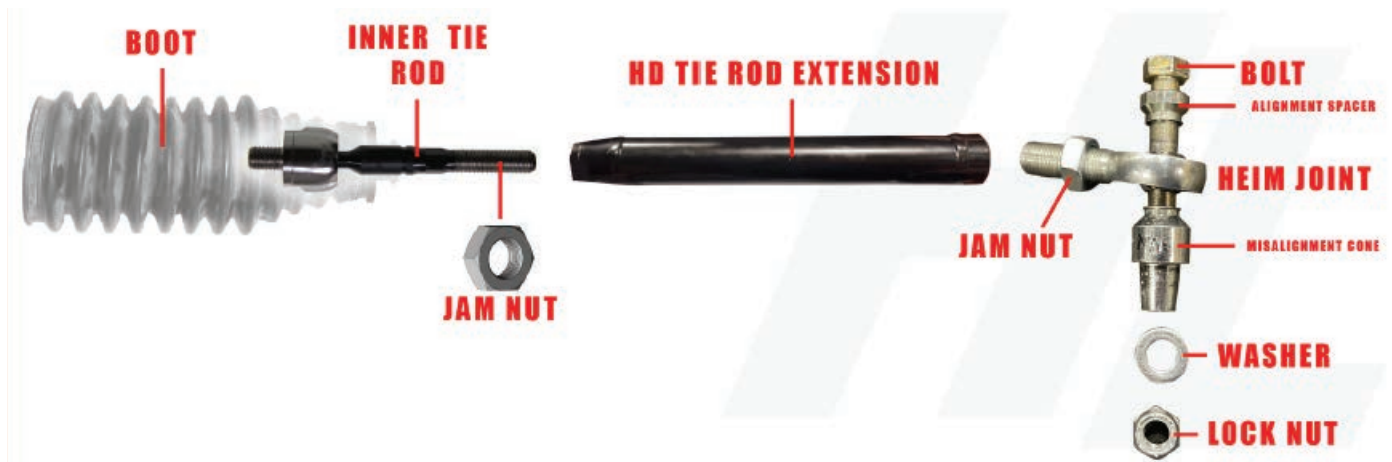



5

Prepare to install the tie rod in. Remove the jam nut. Apply the blue locktight to the threads.



**TIP: INNER TIE RODS CAN BE ADJUSTED, IF NEEDED.**

6

Install the tie rod in onto the factory steering rack and torque to spec. Once installed, slide the boot over the tie rod in. Needle nose pliers can be helpful to get the boot into position.



7

Once the boot is in place, secure by using on zip tie at the back end and one at the front end. Once the zip ties are installed you can clip the excess.



8



Install the tie rod.

Ensure the end with the line is installed facing the rack.





**Install the tie rod end onto the knuckle. Tighten to spec, repeat all steps on the opposite side. Reinstall the wheels and then lower the jack.**



**After installation of the tie rod, the toe will need to be adjusted. Please see the guide on the following pages. Torque specs are also available there.**



---

**NOTE: IF YOU HAVE THE ADV MODEL,  
REFER TO THE FOLLOWING STEPS FOR BED DISSASSEMBLY.**

---

1

Remove the side glass.



2

Unbolt the roof bolts connected to the rear section so the bed will tilt.




3

Remove upper bed cage bolts.



4

Remove lower bed bolts from both the rear wheel wells on both sides.

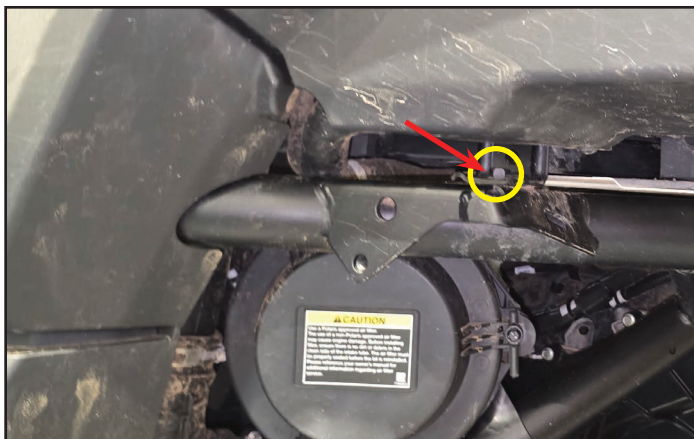


4

If equipped, remove the rear upper speakers.



5

Unbolt the rear headliner to gain access to the roof screws.

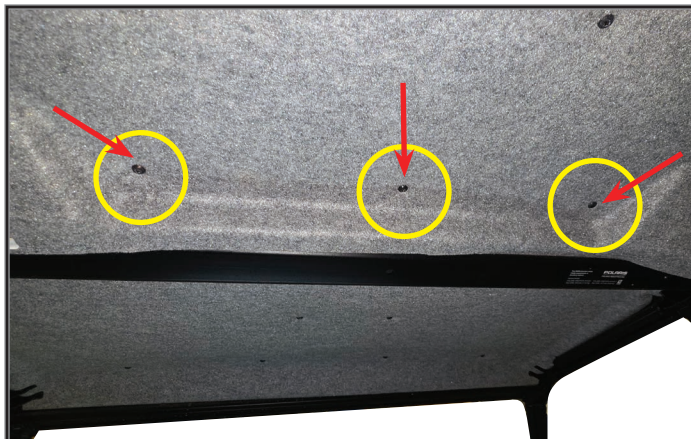


6

**Remove top screws to be able to tilt the bed.**




7

**Remove all inner and outer push pins, and screws, and remove both the inner and outer cover off the machine.**

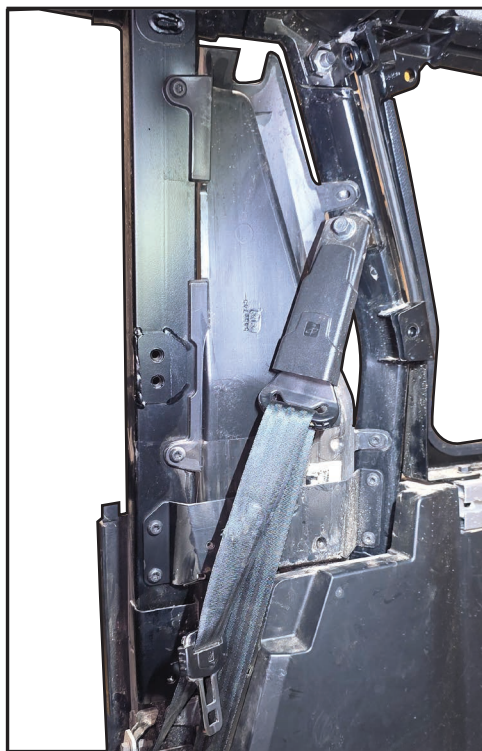

8

Lower the seat back and remove so that the bed bolts are accessible. Remove hardware as shown below.

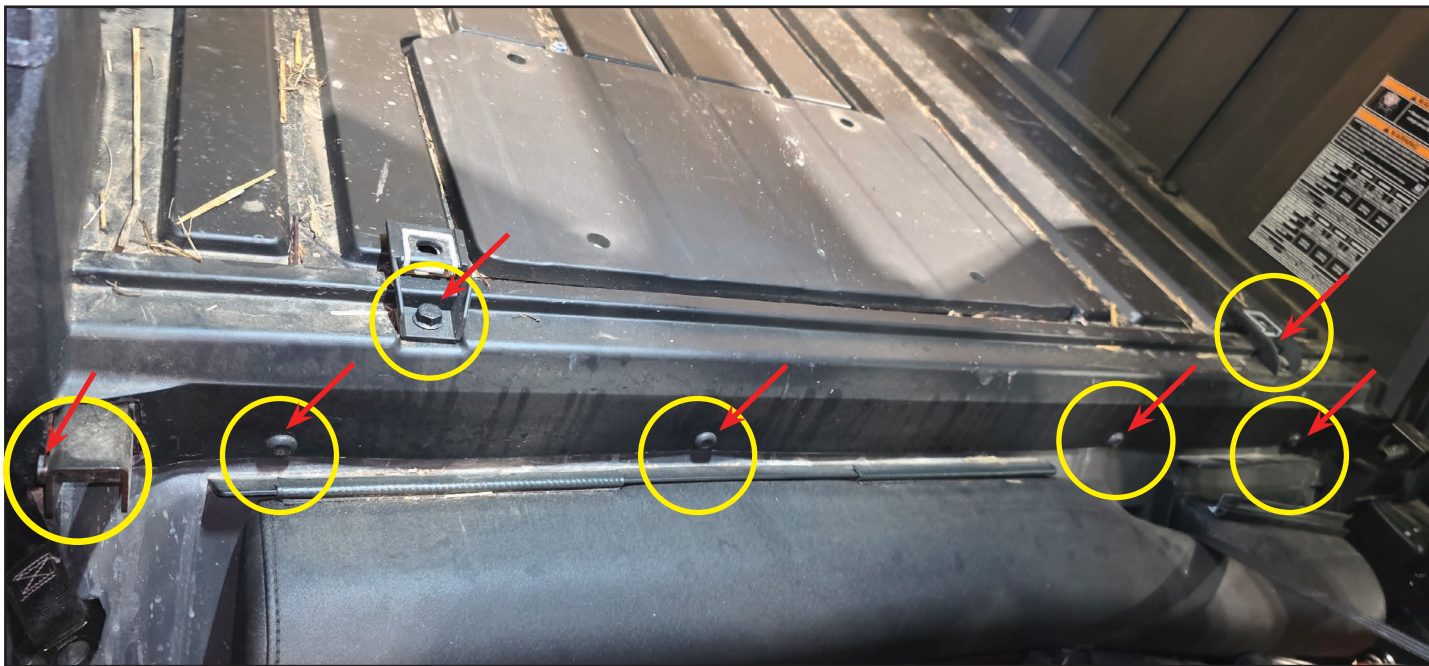

9

Tilt the bed and lift the top to provide space for installing the rear brackets. The bed will need to be held up in place during bracket installation.








## REAR A-ARM INSTALLATION

### PARTS DIAGRAM

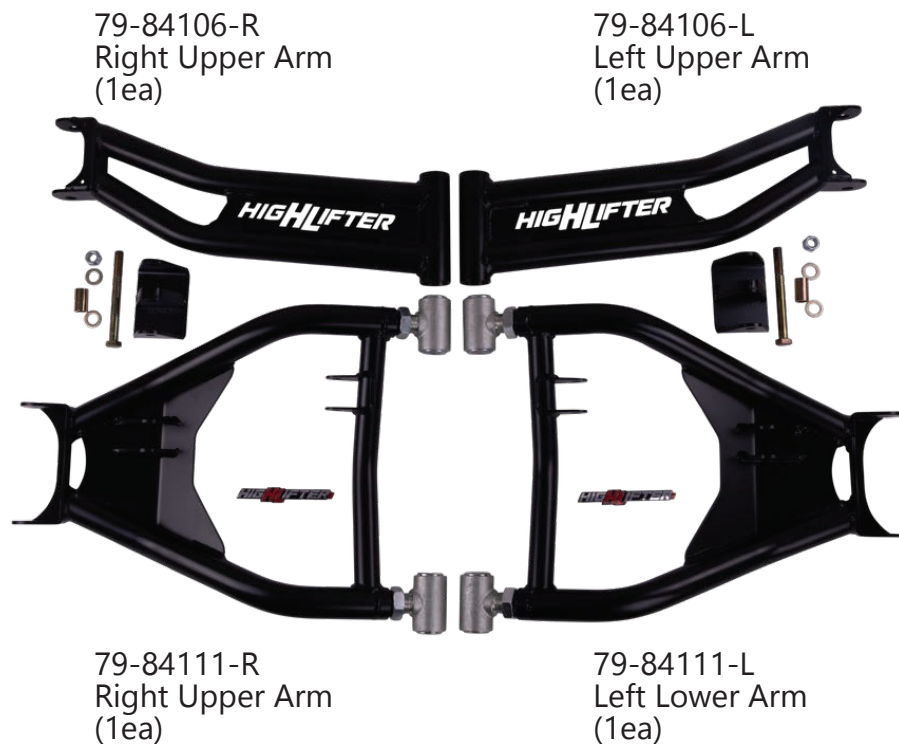

1

**NOTE:** Procedures featured will be performed from the rear **PASSENGER SIDE**. Once steps are completed, you will repeat them on the opposite side. **KEEP ALL FACTORY HARDWARE.**




Place jack under the **FRONT** center of the UTV and lift until the weight is off the suspension. Ensure that the vehicle is properly secured, so that it is stable on the jack.

**Remove the rear wheel.**



### BRAKE LINE CLAMPS

2

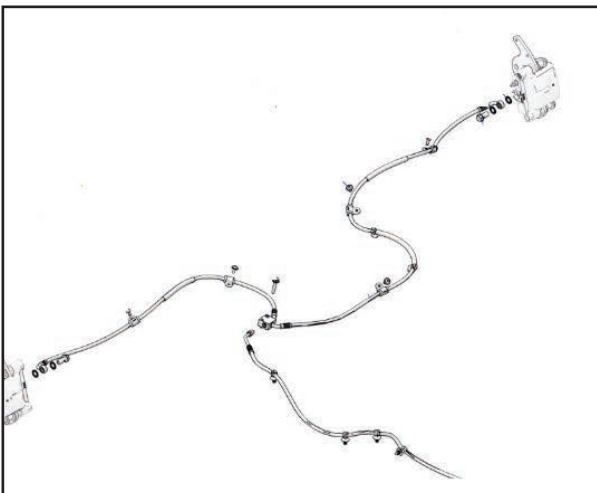

Bend up or drill out the factory p-clamps until they snap off, then remove the clamps.

You will reuse these lines. Do not disconnect the calipers from the lines. Just disconnect from the caliper mounting brackets and tie up out of the way so not to get in your way as you work.

### HUB ASSEMBLY

3






Disconnect the hub assembly from the arms. You will reuse the factory hardware to connect the new control arms to the frame.

**NOTE: YOU DO NOT NEED TO DISCONNECT THE HUB FROM THE BRAKE LINE OR AXLE.**

**\*CAUTION: DO NOT ALLOW THE AXLE/HUB TO DROOP WITHOUT SUPPORT. IT CAN CAUSE IT TO COME OUT OF THE REAR DIFFERENTIAL. IT IS HELPFUL TO SUPPORT WITH A STRAP.**

4

Disconnect the upper arm FIRST, then disconnect the lower arm, shock, and sway-bar. You will reuse the factory hardware to reconnect the new control arms to the frame.

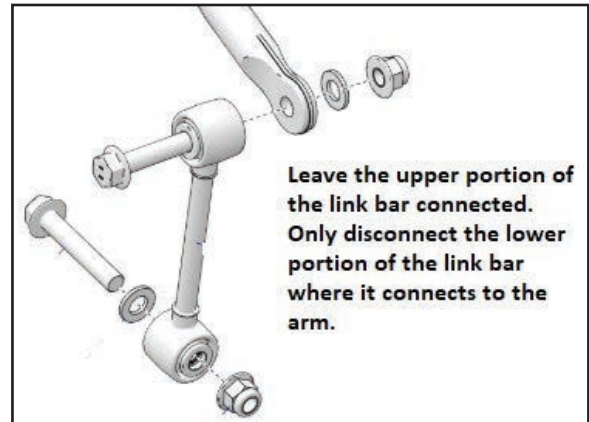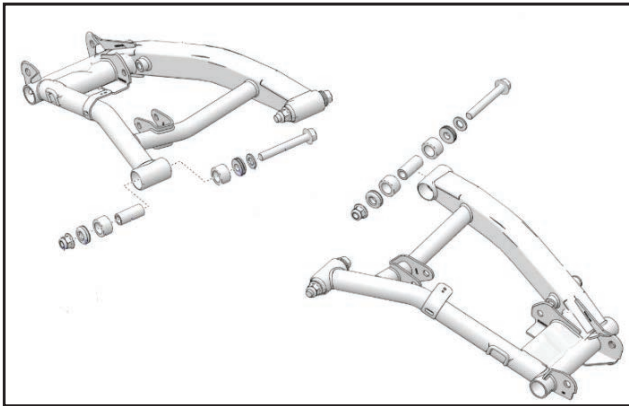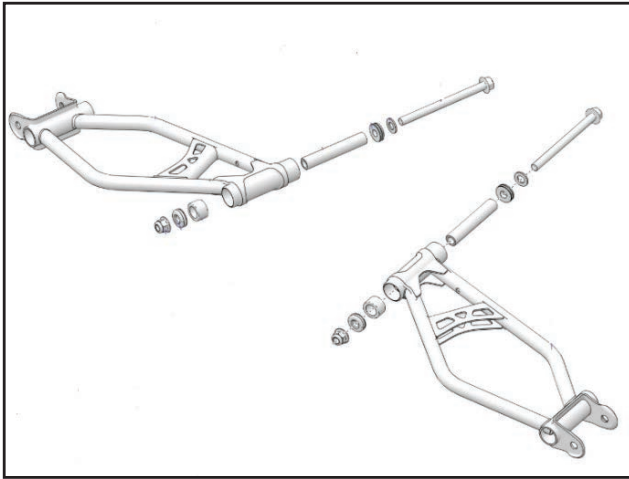


## Shock Removal and Bracket Assembly

## CONTROL ARMS

5

Disconnect the shock from the upper and lower shock mounts, and place the upper shock bracket over the frame. Insert the 12mm x 110mm bolt through the shock relocate bracket, shock eyelet, through the bracket again, and spacer. Fasten the hardware on the back side with a lock nut.

**NOTE:** You can install the shock now or wait until the end. For these instructions, shock will be installed at the end so it's not in the way.

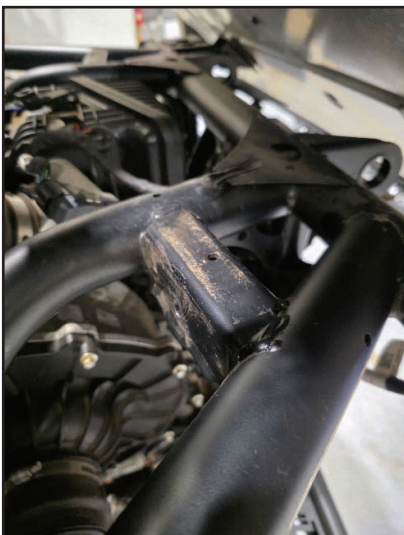

6



**NOTE: IF YOUR BUSHINGS ARE PRE-INSTALLED, SKIP TO STEP 8.**

Use caution when removing the bushing from the collar, there is a stop built into the factory arm that pre-vents the bushing from pushing out when installed. Because of this, the bushing must be pushed out from the opposite side! A flat punch is recommended to remove the bushings.



7


Reinstall the bushings, sleeves, and pivot caps into the new arm.

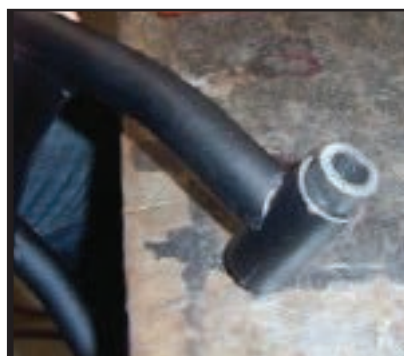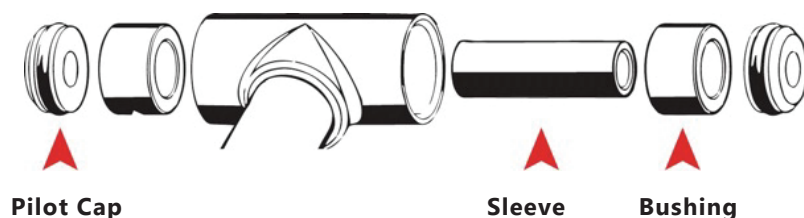

**NOTE: APPLYING GREASE TO THE BUSHINGS AND SLEEVES WILL MAKE THE INSTALLATION EASIER.**  
**NOTE: ONCE THE BUSHING IS INSERTED, YOU WILL NEED TO USE A SOCKET TO HELP PRESS IT IN ALL THE WAY.**

8


Starting with the lower control arm, insert it into the frame tabs. Secure them using the factory hardware. Then connect the lower sway bar to the lower control arm using the factory hardware. Finally connect the lower control arm to the hub assembly using the factory hardware.

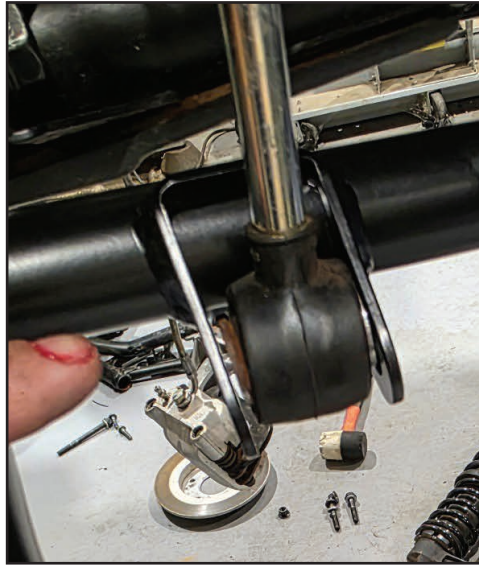

Attach the upper arm to the frame tabs and the hub assembly. Then attach the calipers back onto the hub assembly.



9

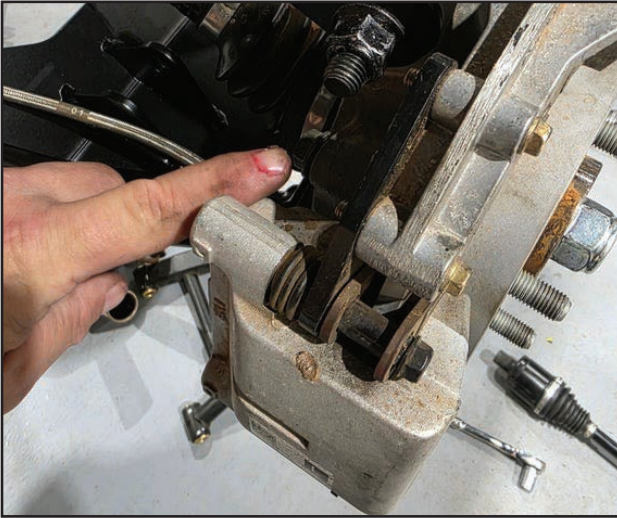

Attach the calipers back onto the hub assembly. Make sure to route the lines so that they do not come in contact with any moving parts.

If you have not done so already, connect the shock to the upper shock mount bracket. Next, insert the 12mm x 110mm bolt through the shock relocate bracket, shock eyelet, through the bracket again, and the spacer. Secure the hardware on the back side with the lock nut.



**Note:** Position the shock eyelet so that it is closest to the the front of the vehicle and the lock nut is always facing towards the rear.

Rotate the shock reservoir rearward for clearance.



Connect the lower shock eyelet to the lower control arm with the factory hardware. Using the brake line clamps provided, secure the brake lines to the lower control arm. Ensure that the lines do not encounter moving parts. Unbolt factory brake line clamps to allow the line to be extended for extra length, if needed.



**[ TORQUE ALL BOLTS TO FACTORY SPECIFICATIONS ]**

**REPEAT STEPS ON OPPOSITE SIDE OF THE VEHICLE**

**Once you have repeated the steps on the opposite side, place the wheels back on the vehicle.  
Lower the jack, and then inspect the wheel camber.**

## WARRANTY INFORMATION



### HIGH LIFTER LIMITED LIFETIME WARRANTY

High Lifter offers a Limited Lifetime Warranty to the original purchaser that our product shall be free from defects in material and workmanship for the life of the product if utilized in accordance with the manufacturer's instructions for installation and operation of said products.

#### LIMITED LIFETIME WARRANTY EXTENDS TO THE FOLLOWING PRODUCT LINES:

- Lift Kits (Signature, Standard and Big Lifts)
- Control Arms
- Trailing Arms
- Radiator Relocation Kits
- Portal Gear Lifts
- Wheel Spacers
- Tow Hooks
- Control Arm Link Kits
- Racks

Damages to vehicle or any other object during the installation, use, or removal of High Lifter products are not covered under this warranty. Normal wear items included with any of the products covered under this Limited Lifetime Warranty are excluded from coverage. These items include, but are not limited to heim joints, tie rods, bearings, bushings, seals, gaskets, zinc plating, painted and powder coated finishes. Other exclusions of coverage under this warranty include, but are not limited to: damage or product failure due to improper installation, lack of maintenance, product modification, abuse, collision or use on vehicles for which product was not designed, repairs performed by anyone other than approved High Lifter personnel or made using non-High Lifter components. This warranty is valid for the original purchaser only and is non-transferable. High Lifter reserves the right to inspect any product before determining if the claim is valid and covered under this warranty. Claims determined to be caused by reasons other than a manufacturer defect will be rejected and an estimate for repair or cost of a replacement product if a repair is not possible, will be provided.

**This warranty is exclusive** and is in lieu of any implied warranty of merchantability, fitness for a particular purpose or other warranty of quality, whether express or implied, except the warranty of title.

#### WARRANTY PROCESSING

If you suspect your product is defective, **DO NOT disassemble the product** to determine the cause without prior approval as it may void your warranty status. This is especially true with our Portal Gear Lift. To begin the claim process, please e-mail our warranty team at [warranty@highlifter.com](mailto:warranty@highlifter.com) and include the following in the e-mail:

- Your full name, address and contact phone number
- The year, make and model of your vehicle
- The part number of the product
- Photos of the product installed, and vehicle product is installed on
- Proof of purchase (Required for all warranty claims and you must be the original purchaser)

Once a claim is created, you will receive a return authorization number (RMA). Write this number on the outside of the box containing your defective product and include it along with your name and contact information inside the box. Product must be returned in the original box or a box of equal strength and packaging. Product sent without an RMA number visible on the outside of the box or sent COD will be refused. Ship your product to the following address:

High Lifter Products  
Attn: Returns 7455 Atkinson Dr, Shreveport, LA 71129

Once your product is received, we often have your replacement or repaired product shipped back to you within 3-business days of receiving it. Please note that **High Lifter is not responsible** for shipping charges on product returned for warranty or repair, including duties and fees required by those residing outside the United States.